

25. EFFECT FADER


Using by this control, you can adjust signal level of echodelay and repeat & exteral effector.

26. HEADPHONE FUNCTION SELECT SWITCH

The master volume control for the monitor. PFL output signal to the headphone jack.

27. HEADPHONE JACK

You can monitor working condition by sound thru the headphone.

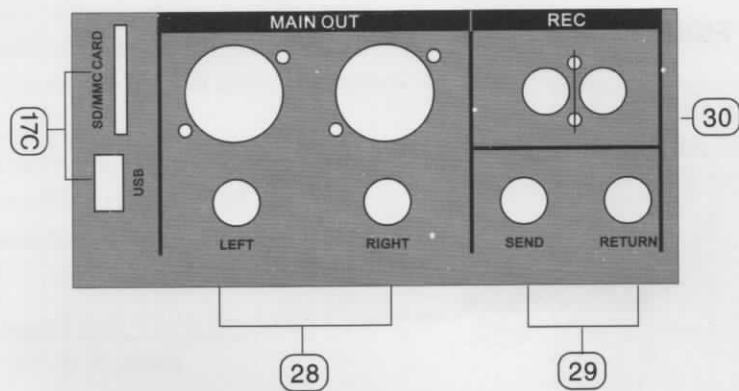

FEATURES ON FRONT PANEL

28. OUTPUT JACK (LEFT/RIGHT)


In this product, the final confirmed sound can be sent to main amplifier through XLR & 1/4 jack.

29. EFX SEND, RETURN

This can be used to connect all kinds of effects from outside.

30. RECRD PIN JACK

This jack can be connected with cassette when recording the mixed output.

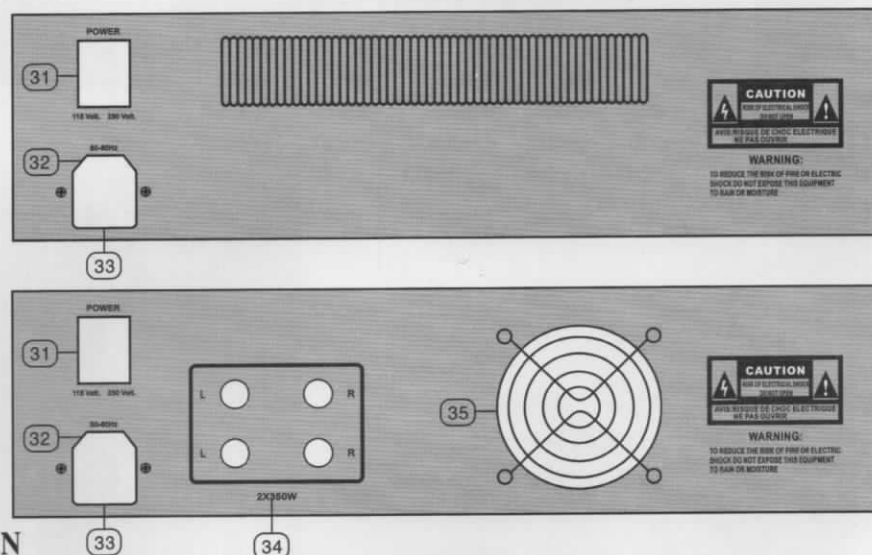

POWER SECTION

31. POWER SWITCH

Push button(31), when you want to operate. The LED (SEE NO, 14) will be turned on when working.

32. FUSE HOLDERS

When occur a problem on this appliance, the fuse will be cut off power to prevent form aproblem.

33. AC POWER CORD

AC220~240V 50~60Hz *Check the power source of AC 220V before connections

34. SPEAKER JACK LEFT, RIGHT

This is same functions as below but the using jack is different.

35. FAN

In order to prevent rising the inside temperature, the inside heat is emitted outside.